


E Battery External Display Panel User Manual

Introduction

E Battery External Display Panel is used to connecting with E-Series Battery to show the information of the battery.

Button Description

Power button	<ol style="list-style-type: none"> 1. When the display panel is turned off, press and hold the power button to power on the display panel. 2. When the display panel is turned on, press and hold the power button to power off the display panel. 3. When the display panel is turned on, press the power button to switch on or off the backlight.
Confirm button	Invalid.
Select button	Invalid.
Menu button	Press menu button to switch between main page and other information page.

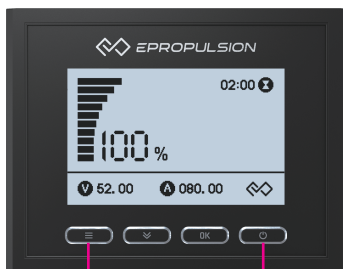


Menu

Power


Connect with battery

1. Connect with battery

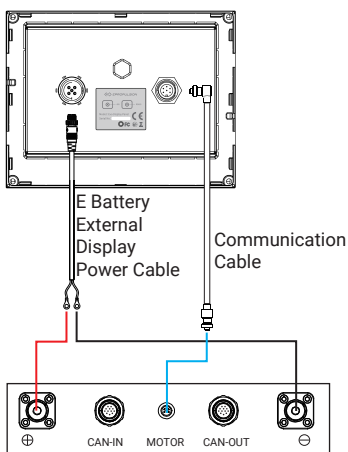









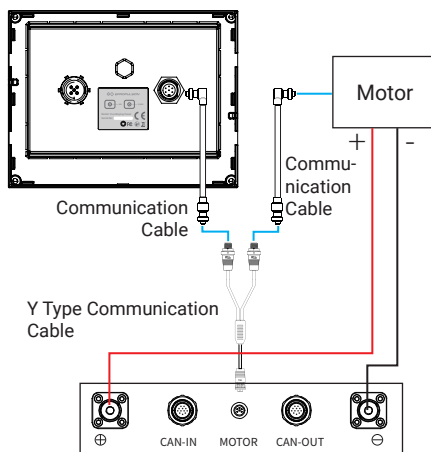

E Series Battery

2. Connect with battery and motor



E Series Battery

Figure

	Battery level	Indicating battery level.
	Battery voltage	Battery voltage, unit: V
	Battery current	Battery current, unit: A. A positive number indicates the charging current and a negative number indicates the discharge current.
	Battery remaining time	Battery remaining time. Displaying NA means that the data is invalid.
Equipment offline.	Equipment offline	The communication between the battery and the display panel is failed.
	Battery error	Hidden: No error Blink: Error occurs
	Battery charging indicator	Hidden: Not charged Shown constant: Charging
	Battery max output power	Battery current max output power
	Battery undervoltage protection value	Battery current undervoltage protection value
	Battery highest temperature	Battery current highest temperature
	Battery lowest temperature	Battery current lowest temperature
Battery error code	Low battery level	

Specification

Size	138.5 x 106.9 x 42.5 mm
Display panel	4.3"
Image resolution	256x160
Power supply	5V / 48V

In the box

Evo Display Panel	1 Set	Fixing guide	1 Piece
User manual	1 Piece	Communication cable 5m	1 Piece
Y type communication cable 0.3m	1 Piece	E battery external display power cable 5m	1 Piece

Warranty

ePropulsion E Battery External Display Panel is guaranteed against any manufacturing defects for TWO years (uncommercial) from the date of purchase.


E Battery External Display Panel User Manual

Introduction

E Battery External Display Panel is used to connecting with E-Series Battery to show the information of the battery.

Button Description

Power button	<ol style="list-style-type: none"> 1. When the display panel is turned off, press and hold the power button to power on the display panel. 2. When the display panel is turned on, press and hold the power button to power off the display panel. 3. When the display panel is turned on, press the power button to switch on or off the backlight.
Confirm button	Invalid.
Select button	Invalid.
Menu button	Press menu button to switch between main page and other information page.

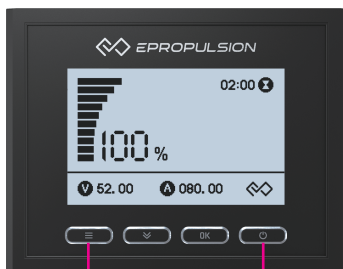


Menu


Power

Connect with battery






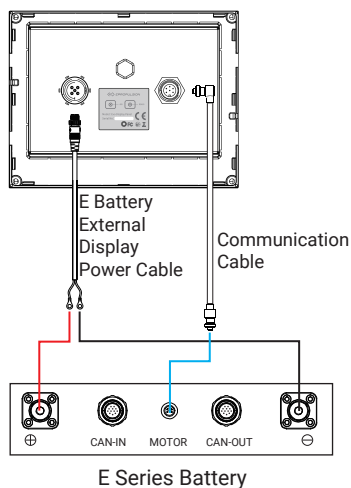

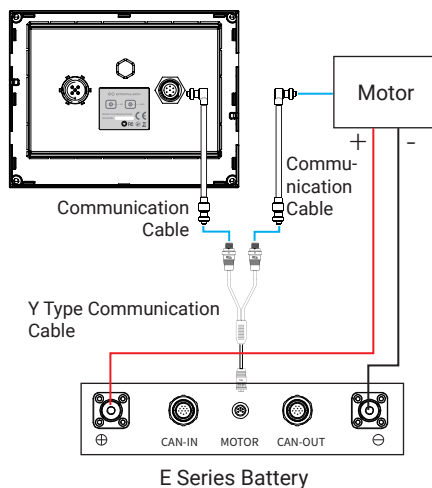


1. Connect with battery



2. Connect with battery and motor



Figure

	Battery level	Indicating battery level.
	Battery voltage	Battery voltage, unit: V
	Battery current	Battery current, unit: A. A positive number indicates the charging current and a negative number indicates the discharge current.
	Battery remaining time	Battery remaining time. Displaying NA means that the data is invalid.
Equipment offline.	Equipment offline	The communication between the battery and the display panel is failed.
	Battery error	Hidden: No error Blink: Error occurs
	Battery charging indicator	Hidden: Not charged Shown constant: Charging
	Battery max output power	Battery current max output power
	Battery undervoltage protection value	Battery current undervoltage protection value
	Battery highest temperature	Battery current highest temperature
	Battery lowest temperature	Battery current lowest temperature
Battery error code	Low battery level	

Specification

Size	138.5 x 106.9 x 42.5 mm
Display panel	4.3"
Image resolution	256x160
Power supply	5V / 48V

In the box

Evo Display Panel	1 Set	Fixing guide	1 Piece
User manual	1 Piece	Communication cable 5m	1 Piece
Y type communication cable 0.3m	1 Piece	E battery external display power cable 5m	1 Piece

Warranty

ePropulsion E Battery External Display Panel is guaranteed against any manufacturing defects for TWO years (uncommercial) from the date of purchase.